



Next-generation crimper for low pressure hose assemblies. Two-in-one solution with integrated die sets O5 and O15 for DN 03-16. With the SL 3-16 M, UNIFLEX innovates the existing crimper: Two integrated die sets in one tool. No more lost time changing the die. Just change the handle and you are already crimping the other size. No risk of losing dies, no dirty hands, no "time lost". With the built-in handle, you can easily carry it anywhere.


SL 3-32 M and SL 3-75 complete the range with large opening travel up to 3".




SL 3-16 M



SL 3-32 M

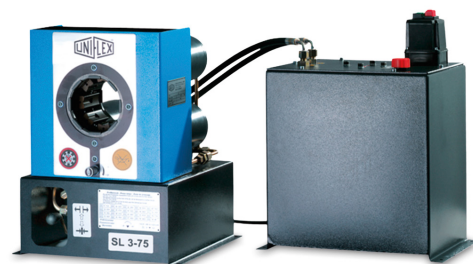

SL 3-75_A (PUU not included)

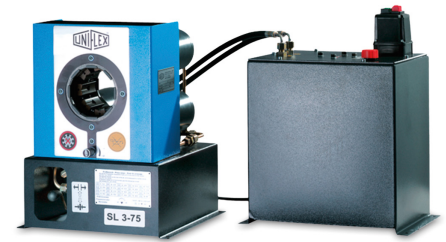

SL 3-16 M



SL 3-32 M

SL 3-75

Technical Data	SL 3-16 M	SL 3-32 M	SL 3-75
Crimp force (kN/Ton)	30/3	200/20	500/50
Opening travel (mm/inch)	+31.7/+1.24	+36.7/+1.44	+55/+2.16
Industrial	5/8**	1 1/4 **	3**
Opening without dies (mm/inch)	38.6 / 1.52	88 / 3.46	115 / 5.52
Type of dies	150	263	239
Master dies length (mm/inch)	10/0.39	68/2.68	75/2.95
L x W x H (mm)	340 x 143 x 780	216 x 165 x 348	420 x 520 x 550
Weight	20 kg	28 kg	88 kg

** With master dies.

Dies 150: 6.9 mm and 14.9 mm.

Type of dies		Type of dies	
	263		239
Ø mm	mm	Ø mm	mm
6.8	40	6.8	50
9	75	9	50
12	75	10	50
14	75	12	50
17	75	14	60
20	75	16	60
24	75	17	60
28	75	19	60
32	75	20	60
36	75	22	60
40	75	24	60
44	75	26	75
47	75	28	75
		30	75
		31	75
		32	75
		34	75
		36	75
		38	75
		39	75
		40	75
		44	75
		47	75
		50	75
		54	75
		57	75
		62	75

Description



2 sets of dies integrated,
no dies set change!
(Only for SL3-16M)