



The UNE 10 and UNE 115 are high-performance tools for production and the workshop. These machines now permit fittings up to 3" to be inserted or extracted. Due to its innovative rapid tool sled, the insertion of 90 degree, 45 degree or straight fittings without changing tools is now simple and quick with the UNE 115.

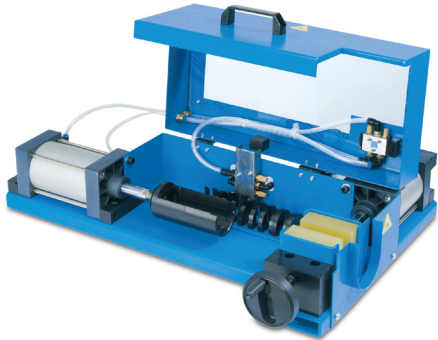

UNE 10

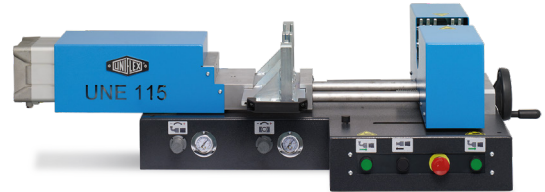

UNE 115

Technical Data	UNE 10	Technical Data	UNE 115
Max. nipple insertion (OD fitting, straight or elbow)	< 2*	Working range	< 3*
Force	5.1 kN (6 bar)	Pistonsub	200 mm
Piston stroke	100 mm	Hose max. outside	Ø 120 mm
L x W x H (mm)	600 x 810 x 310	Compressed air connection	8 bar
Weight	35 kg	Insertion force	8 kN (8 bar)
Pneumatic air supply	7 bar/100 psi	Clamping force	8 kN (8 bar)
		Control	Foot pedal and two-hand release
		L x W x H (mm)	625 x 1,185 x 320
		Weight	100 kg
		Pneumatic air supply	7 bar/100 psi

* According to the manufacturer.

Description



Preloading Safety control coupled to foot pedal.



Secure clamping unit.



Axially adjustable clamping unit - prevents bending of small hose dimensions.