



UNIFLEX hose cutting machines have been a synonym for the highest precision and robustness for many decades. The solid and compact tools distinguish themselves by their safe and high-quality cutting function. A distinct property is the positioning of the extraordinarily sharp cutting blades close to the powerful motors. This significantly reduces vibration – which is one of the reasons for extreme durability and low maintenance costs.




EM 6 M



EM 8 M



EM 8 P

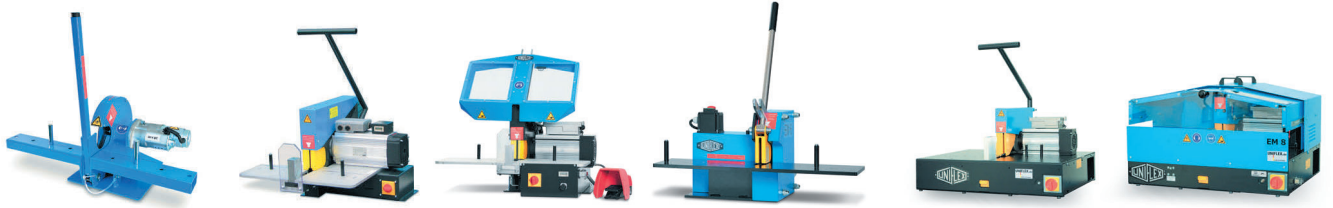

EM 6 DC

EM 6 M

EM 6 P

EM 6 Ecoline




EM 8 M

EM 8 P


Technical Data	EM 6 DC	EM 6 M	EM 6 P	EM 6 Ecoline	EM 8 M	EM 8 P
Production 4-spiral	–	1¼"	1¼"	–	1½"	1½"
Workshop 4/6-spiral	2"	2"	2"	2"	2"	2"
4-spiral	2"	2"	2½"	2"	2½"	2½"
Industrial	2"	3"	3"	2"	4"	4"
Max. outside (mm)	Ø 75	Ø 95	Ø 95	Ø 80	Ø 120	Ø 120
Feed	manual	manual	pneumatic	manual	manual	pneumatic
Noise level	93 dBA	80 dBA	80 dBA	95 dBA	85 dBA	90 dBA
Brake motor	–	✓	✓	–	✓	✓
Suction connection (mm)	Ø 40	Ø 60	Ø 60	Ø 80	Ø 80	Ø 80
Drive	3.2 kW : 24 VDC	4.6 kW 3~VAC	4.6 kW 3~VAC	2.4 kW 1~VAC	4.6 kW 3~VAC	4.6 kW 3~VAC
Cutting blade (mm)	TM C 250 x 2 x 40	TM C 350 x 3 x 30	TM C 350 x 3 x 30	TM C 275 x 3 x 25,4	TM C 400 x 4 x 30	TM C 400 x 4 x 30
Integrated spark extinguisher	–	–	–	–	✓	✓
L x W x H (mm)	740 x 365 x 610	745 x 690 x 430	820 x 785 x 755	700 x 510 x 700	983 x 760 x 875	983 x 760 x 540
Weight (kg)	29	75	110	45	122	140
Accessories						
Bench	✓	✓	✓	✓	✓	✓
Suction device	✓	✓	✓	✓	✓	✓
UVC 25 Adapter	520.7010	520.7012	520.7012	520.7014	520.7014	520.7014
UVC 50 Adapter	518.7010	518.7012	518.7012	518.7014	518.7012	518.7012
Hose guide (UHG 14)	–	✓	✓	✓	✓	✓
Counter	–	329.1	Standard	–	323.1	323.1

Suction & filter device page 68 / Options and accessories page 70

Description



Guide pins ensure straight cuts.




Blades
TM = plain
TM G = slotted
TM C = coated



329.1 (for EM 6 M)
323.1 (for EM 8)



High-quality cutting blades:
TM C, TM G und TM.



TM C
Lasts 7 times longer, cuts twice as fast, generates less smoke, less debris in the hose and less heat.
Reduces the risk of separation of the rubber from the wire.

Cutting blades